MAGNUM BOARD®



BOUNDARY WALL SOLUTION

Magnum Board's NEW Shiplap Weatherboard is a high-quality magnesium oxide cladding and when installed vertically can be used as a Boundary Wall Solution. It can also be used in Bushfire areas up to and including BAL FZ (Flame Zone). This superior product is the sustainable alternative to fibre cement cladding. With an FRL of 90/90/90, you can rest assured that you are building for the long term.

Beautiful. Functional. Sustainable.

- FRL 90/90/90*
- Boundary Wall Solution*
- Suitable for Bushfire areas (to BAL FZ)*
- Silica Free
- 30 year Warranty
- BEAL Appraisal Certification

Timber Framing


50mm Rockwool Insulation

ProctorWrap RW

Magnum Board Ezi-line (inside wall lining)

Magnum Board Shiplap Weatherboard

Magnum Board Ezi-Line 9mm (on reverse)

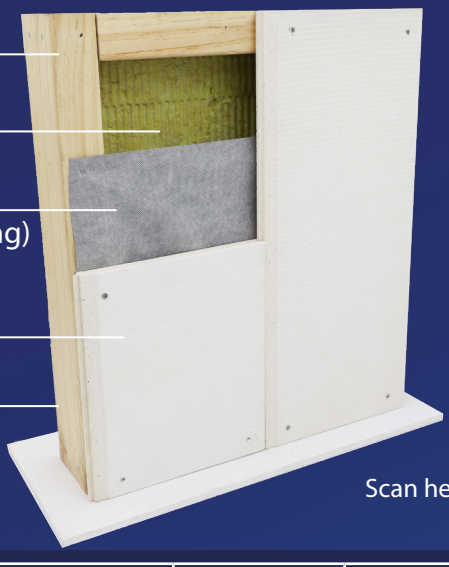

WARRANTY 30 YEAR WARRANTY

BEAL BUILDING ELEMENT ASSESSMENT LABORATORY LIMITED

Scan here for the 30 Year Warranty

Scan here for the Shiplap Installation Guide

Product Code	Description	Thickness	Size	Weight per sheet (kgs)	Spans
MBWBV300021016	Shiplap Weatherboard	16mm	3000x210	13	Up to 600mm
MBRBE2400120009	Ezi-Line 9mm (rebated edge)	9mm	2400x1200	28	Up to 600mm
MBRBE2700120009		9mm	2700x1200	32	Up to 600mm
MBRBE3000120009		9mm	3000x1200	36	Up to 600mm

Scan the QR Code for more information:

* as part of a Beal Appraisal Certification. The full system MUST be used.

HEALTH BASED BUILDING™ our common future

McCORMACKS AUSTRALIA EST 2001

For all orders or enquiries:
Phone: (03) 9701 2777
Email: magnumboard@mccormacksaustralia.com.au
www.mccormacksaustralia.com.au/magnumboard

dctech

PROCTORWRAP

ProctorWrap RW / RW-IT

Vapour permeable air tight wall wrap



ProctorWrap RW is a triple layer calendared polyolefin non-woven textile weather resistant barrier.

This product meets the requirements of AS/NZS 4200.1 and is suitable for use in Australian residential applications.




DCT VulcanWool

Rock fibre stonewool thermal & acoustic insulation

DCT VulcanWool is Ridged insulation non-combustible insulation AS1530.1

DCT VulcanWool is high density Ridged Insulation mineral rock fibre stonewool non-combustible insulation for use in both external and internal insulation applications with water shedding characteristics.

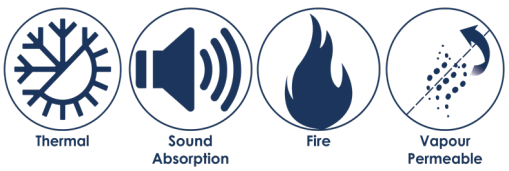

DCT VulcanWool is designed for use in ventilated rainscreen facades and other thermal and acoustic wall, roof, floor and ceiling applications in residential and commercial buildings.

Thickness	Length (mm)	Width (mm)	R-Value (m2K/W)
50mm	1200	600	1.47

HEALTH BASED BUILDING™ our common future

McCORMACKS AUSTRALIA EST 1901

For all orders or enquiries:
Phone: (03) 9701 2777
Email: magnumboard@mccormacksaustralia.com.au
www.mccormacksaustralia.com.au/magnumboard